


REDUCTOR DE JOASA PRESIUNE PENTRU BUTELII DE GAZE LOW PRESSURE REDUCER FOR GAS CYLINDERS RJPB - *

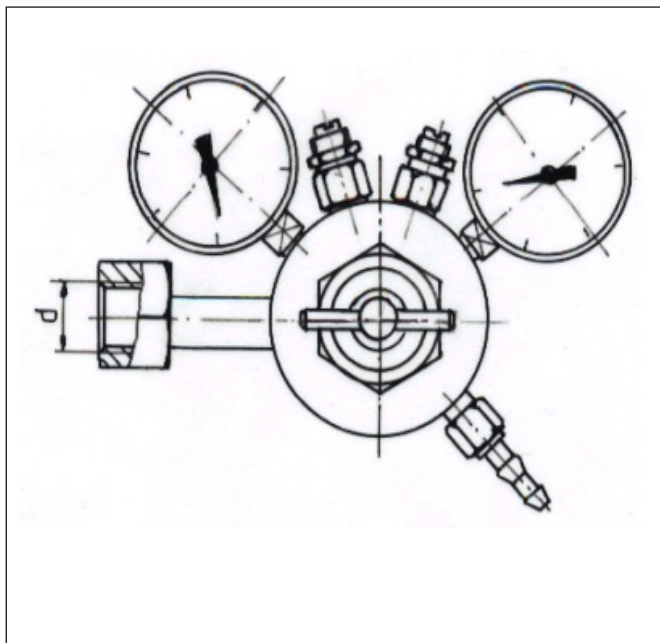

CARACTERISTICI TEHNICE TECHNICAL CHARACTERISTICS

- Debit maxim Q= 1,5m³/h.
- Racord de iesire cu niplu pentru furtun ø6,3
- Material :alama.
- Dimensiuni de gabarit[mm] : 210x196x142.
- Temperatura de functionare : - 20°C... +60°C.

- Maximum flow : Q= 1,5m³/h.
- Nipple outlet connection for hose ø6,3.
- Material : brass.
- Overall dimensions [mm] : 210x196x142.
- Working temperature :-20 °C...+ 60 °C.

starea gazului gas state	*	tipul gazului gas type	filet de racordare threaded connection (d)	presiune intrare inlet pressure (max.) [bar]	presiune iesire outlet pressure (max.) [bar]
comprimat compressed	O	oxigen oxygen	G3/4	200	2
	N	azot nitrogen	W24,32x1/14		
	Ar	argon	W21,8x1/14		
	He	heliu helium			
	H	hidrogen hydrogen	W21,8x1/14LH		
lichefiat liquified	K	dioxid de carbon carbon dioxide	W21,8x1/14	200 la 53 C	

TRUSE DE SUDARE SI TAIERE OXIGAZ;REDUCTOARE DE PRESIUNE PENTRU BUTELII DE GAZE;ROBINETI PENTRU BUTELII DE GAZE;
 APARATE DE TAIERE OXIGAZ;GENERATOARE SI MINIGENERATOARE ACETILENA; ROBINETI CU SFERA; ECHIPAMENT MEDICAL;
 ECHIPAMENT PENTRU INSTALATII SI REțele DE GAZE; CONFECTII METALICE; PIESE TURNATE DIN NEFEROASE; SERVICE.

OXY-GAS CUTTING AND WELDING KITS; PRESSURE REDUCERS FOR GAS CYLIDERS; ACETYLENE GENERATORS AND MINIGENERATORS ;
 ALL VALVES ;MEDICAL EQUIPMENT; DEVICES FOR DIVING EQUIPMENT; EQUIPMENT FOR GAS INSTALLATION AND NETWORKS; METAL
 CONSTRUCTION ;NON - FERROUS METAL CASTINGS;; SERVICE.